


ORLEN Unipetrol RPA, s.r.o.	Zvláštní závit pro vysoký tlak	N 16.107

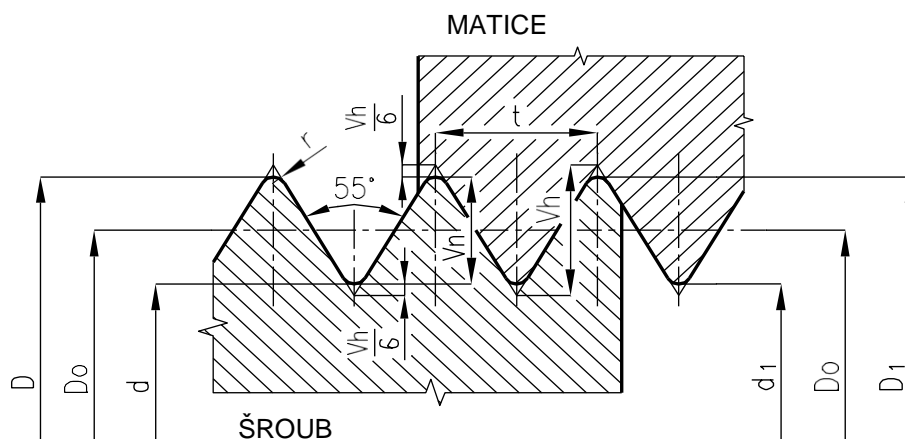

$$t = \frac{25,40095}{z} \quad V_h = 0,96049 \cdot t$$

$$V_n = 0,64033 \cdot t \quad r = 0,13733 \cdot t$$

Příklad značení : IG 81x 1/8"

Jmenovitý průměr závitu	Šroub						Matice				Počet chodů na 1"
	Velký průměr		Střední průměr		Malý průměr		Střední průměr		Malý průměr		
	D		D ₀		d		D ₀		d ₁		
D = D ₁	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	z
26	25,890	25,670	24,983	24,878	23,966	23,756	24,983	25,088	24,080	24,450	16
81	80,770	80,430	78,967	78,798	76,934	76,596	78,967	79,136	77,160	77,650	8
89	88,770	88,430	86,967	86,798	84,934	84,596	86,967	87,136	85,160	85,650	8
95	94,630	94,150	91,747	91,518	88,494	88,036	91,747	91,976	88,870	89,490	5
101	100,770	100,430	98,967	98,798	96,934	96,596	98,967	99,136	97,160	97,650	8
106	105,770	105,430	103,960	103,790	101,930	101,590	103,960	104,130	102,160	102,650	8
114	113,590	113,070	110,386	110,145	106,772	106,290	110,386	110,627	107,190	107,850	4 1/2
125	124,690	124,280	122,289	122,095	119,578	119,190	122,289	122,483	119,890	120,450	6
225	224,590	224,070	221,386	221,156	217,772	217,312	221,386	221,616	218,190	218,850	4 1/2
282	281,470	280,830	277,353	277,096	272,706	272,192	277,353	277,610	273,240	274,030	3 1/2

Nahrazuje :	Správce normy :	Platnost od :
N 16.107 z 10/1970	Sekce podpory údržby	1.1.2001 (Aktuálnost ověřena 2.2.2022)