


ORLEN Unipetrol RPA s.r.o.	Závrtné šrouby	N 16.261

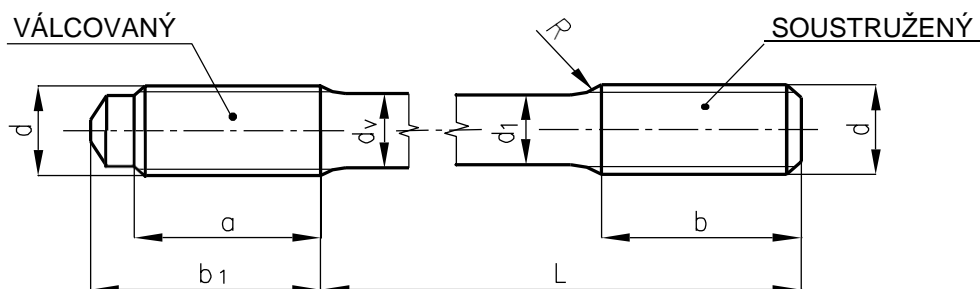

Označení : Závrtný šroub W 3/4"x 60 z oceli 12040 podle N16.261

Šroub W	1/2"	5/8"	3/4"	7/8"	1"	1 1/8"	1 1/4"	1 1/2"	1 3/4"	2"
Materiál	12040 ( 13141, 12050 )									
Č.výkresu SN16261.xx	.1-L	.2-L	.3-L	.4-L	.5-L	.6-L	.7-L	.9-L	.11-L	.12-L
Materiál	15236 ( 15320 )									
Č.výkresu SN16262.xx	.1-L	.2-L	.3-L	.4-L	.5-L	.6-L	.7-L	.9-L	.11-L	.12-L
Materiál	15130									
Č.výkresu SN16263.xx	.1-L	.2-L	.3-L	.4-L	.5-L	.6-L	.7-L	.9-L	.11-L	.12-L
b	35	35	35	40	45	50	55	60	65	70
b <sub>1</sub>	22,5	28,0	33,5	38,0	42,5	50,0	26,0	65,0	76,0	87,0
a	16,5	20,5	25,5	28,5	31,5	38,0	42,0	50,0	58,0	66,0
d	12,55	15,71	18,87	22,02	25,17	28,31	31,49	37,79	44,08	50,39
d <sub>v</sub>	11,27	14,32	17,34	20,33	23,28	26,16	29,33	35,29	41,09	47,09
d <sub>1</sub> ★	9,7	12,7	15,5	18,3	21,0	23,60	26,80	32,40	37,60	43,20
R ★	10	10	10	10	10	10	10	12	12	12

★ Platí pouze pro šrouby soustružené

Použití podle N16.4

Tvarové značení dle N10.126

Závrtný konec podle N16.232

Číslování výkresů - příklad :

SN16261.3 výrobní výkres šroubu W 3/4" bez udané délky z materiálu 12040  
 SN16261.3-60 výrobní výkres šroubu W 3/4"x 60 ( délka L=60 ) z materiálu 12040

<b>Nahrazuje :</b>  N 16 261 z 2/1978	<b>Správce normy :</b>  Sekce podpory údržby	<b>Platnost od :</b>  1.1.2001 (Aktuálnost ověřena 2.2.2022)
--	--	---

**N 16.261**

Sroub W	1/2"	5/8"	3/4"	7/8"	1"	1 1/8"	1 1/4"	1 1/2"	1 3/4"	2"
L	Hmotnost 10 ks v kg									
40	0,60									
50		1,12								
60			1,92							
75				3,10						
85					4,50					
100						6,80				
110							9,20			
135								16,20		
175									29,00	
220										48,10