


| | | |
|--------------------------------|-------------------|----------|
| ORLEN Unipetrol RPA, s.r.o. | Svorníkové šrouby | N 16.225 |
| | | |

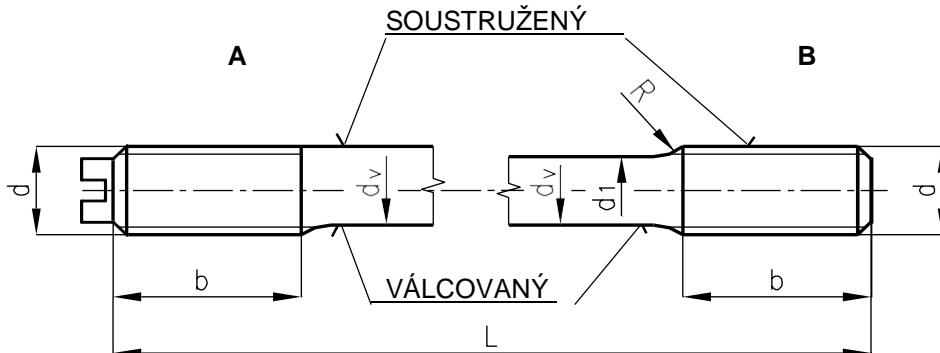

Označení : Svorníkový šroub W 1 1/8"x 190 z oceli 12040 podle N16.225

| Provedení | A | | | | | B | | | | |
|-------------------------|------------------------|-------|------------|-------|-------|--------|--------|--------|--------|-------|
| Šroub W | 1/2" | 5/8" | 3/4" | 7/8" | 1" | 1 1/8" | 1 1/4" | 1 1/2" | 1 3/4" | 2" |
| Materiál | 12040 (13141, 12050) | | | | | | | | | |
| Č.výkresu SN16225.xx | .01-L | .02-L | SN17225.xx | | | .1-L | .2-L | .4-L | .6-L | .7-L |
| | | | .1-L | .2-L | .3-L | | | | | |
| Materiál | 15130 | | | | | | | | | |
| Č.výkresu SN16227.xx | .01-L | .02-L | .1-L | .2-L | .3-L | .4-L | .5-L | .7-L | .9-L | .10-L |
| Materiál | 15236 (15320) | | | | | | | | | |
| Č.výkresu SN16223.xx | .01-L | .02-L | .1-L | .2-L | .3-L | .4-L | .5-L | .7-L | .9-L | .10-L |
| d | 12,55 | 15,71 | 18,87 | 22,02 | 25,17 | 28,31 | 31,49 | 37,79 | 44,08 | 50,39 |
| dv | 11,27 | 14,32 | 17,34 | 20,33 | 23,28 | 26,16 | 29,33 | 35,29 | 41,09 | 47,09 |
| d1★ | - | - | - | - | - | 23,60 | 26,80 | 32,40 | 37,60 | 43,20 |
| b | 25 | 30 | 35 | 40 | 45 | 48 | 53 | 60 | 65 | 70 |
| R★ | - | - | - | - | - | 10 | 10 | 12 | 12 | 12 |

★ Platí pouze pro šrouby soustružené

Použití podle N16.4

Tvarové značení dle N10.126

Číslování výkresů - příklad :

SN16225.1 výrobní výkres šroubu W 1 1/8" bez udané délky z materiálu 12040

SN16225.1-190 výrobní výkres šroubu W 1 1/8"x 190 (délka L=190) z materiálu 12040

| | | |
|--|--|---|
| Nahrazuje : N 16.225 z 3/1980 | Správce normy : Sekce podpory údržby | Platnost od : 1.1.2001 (Aktuálnost ověřena 2.2.2022) |
|--|--|---|

N 16.225

| Sroub W | 1/2" | 5/8" | 3/4" | 7/8" | 1" | 1 1/8" | 1 1/4" | 1 1/2" | 1 3/4" | 2" |
|---------|---------------------|------|------|------|------|--------|--------|--------|--------|-------|
| L | Hmotnost 10 ks v kg | | | | | | | | | |
| 75 | 0,55 | | | | | | | | | |
| 90 | | 1,10 | | | | | | | | |
| 95 | | 1,20 | | | | | | | | |
| 110 | | | 2,45 | | | | | | | |
| 120 | | 1,35 | | | | | | | | |
| 130 | | 1,45 | | | | | | | | |
| 135 | | 1,60 | | 4,00 | | | | | | |
| 140 | | | 3,15 | | | | | | | |
| 155 | | | | | 6,40 | | | | | |
| 165 | | 1,80 | | | | | | | | |
| 190 | | 1,95 | | | | 9,20 | | | | |
| 205 | | | | | | | 12,50 | | | |
| 215 | | | | | | 10,80 | | | | |
| 255 | | | | | | | | 23,00 | | |
| 275 | | | | | | | | 24,50 | | |
| 290 | | | | | | | | 25,80 | | |
| 325 | | | | | | | | | 40,00 | |
| 345 | | | | | | | | | 42,20 | |
| 415 | | | | | | | | | | 67,10 |